



OLI-NATURA Hardwax oil

OIL-WAX COMBINATION FOR THE BASIC TREATMENT OF WOOD, CORK AND OSB FLOORING AS WELL AS FOR STAIRS, DOORS AND WORKTOPS IN THE INTERIOR.



A true classic: OLI-NATURA Hardwax oil is made of vegetable oils, waxes and resins, and combines the deep impregnating effect of an oil with the surface protection of a wax. Easy application by hand and machine; two coats are necessary. Due to its proportion of wax it is polishable and slightly higher in gloss with a 'greasier' touch than purely oiled surfaces.

Suitable for all applications in the interior.

- Easy application, by hand and machine
- Large scope of application areas
- Pleasant waxy look

Colours: uncoloured, silk matt, in RAL colours

Packaging: 3, 1 l

Consumption: 2 coats | 40-50 g/sqm per coat (20-25 sqm/l), depending on the absorptivity of the surface

Tools: Mohair roller, oil brush or flat brush, white pad

After-treatment and care: For regular maintenance cleaning we recommend OLI-NATURA Wood Soap



Technical data

scan QR-Code

OLI-NATURA HS Hardwax oil

HIGH-SOLID OIL-WAX COMBINATION FOR THE BASIC TREATMENT OF HIGH-TRAFFIC FLOORBOARDS AND PARQUET FLOORING, WOODEN AND CORK FLOORS IN THE INTERIOR.



The evolution of a classic: containing almost no solvents, it is not only a high-solid but also a high-tech product specifically designed for machine application. Professionals appreciate HS Hardwax oil because it remains open longer than conventional hardwax oils, and since it can be padded after 90 minutes, it enables a quick treatment even of large surfaces without any problems. Due to its wax content, it is polishable and thus slightly higher in gloss compared to purely oiled surfaces.

Suitable for all applications in the interior.

- Highly productive
- Long application time frame – 90 min
- Ideally suitable for large and high-traffic floors
- DIBt certified

Colours: Nature/uncoloured

Packaging: 3, 1 l

Consumption: 2 coats | 20-40 g/sqm per coat (25-50 sqm/l), depending on the absorptivity of the surface

Tools: Mohair roller, oil brush or flat brush, white pad

After-treatment and care: For regular maintenance cleaning we recommend OLI-NATURA Wood Soap



Technical data


scan QR-Code

OLI-NATURA OILS & WAXES

are based on plant oils and close to nature raw materials. They provide protection and care of wood in the interior and exterior. They are specifically designed for the demands of professional users and neither contain biocidal substances nor preservatives. The fully hardened material is completely safe to use and represents no health hazard for man, animals or plants. It meets the DIN EN 71-3 (safety of toys) and DIN 53160 (saliva and sweat proof) standards.



Your dealer

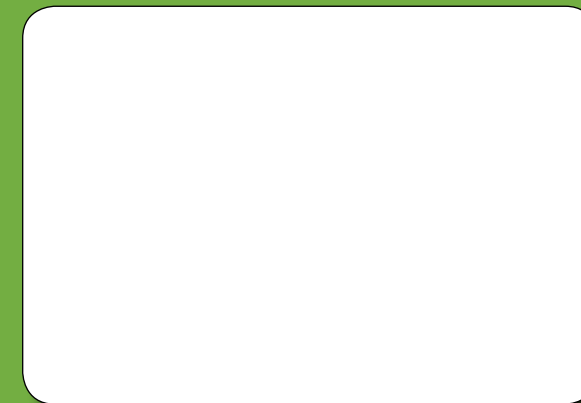

Oli Lacke GmbH
Bahnhofstr. 22 | 09244 Lichtenau | Germany
Tel. +49 (0) 37208/84-0
Fax +49 (0) 37208/84-382
info@oli-lacke.de | www.oli-lacke.de

GB_OLI_NATURA_Handwerk_ST_GM_29072015

NATURAL OILING.

OLI-NATURA OILS & WAXES



Colour overview on pine:



Colour overview on oak:



Note: colour deviations may appear owing to the printing process.



OLI-NATURA Project oil

MEDIUM-SOLID OIL FOR THE UNIVERSAL BASIC TREATMENT AND CARE OF FURNITURE SURFACES, WOODEN FLOORS, STAIRS, AND FOR WETROOMS.



OLI-NATURA Project Oil is our universal natural oil with 60% solids which was designed for an easy application also by hand. Due to its excellent auto-penetration, Project Oil is suitable for the impregnation of larger surfaces, such as parquet floors and worktops, but also for furniture and floorboards with chamfers that are normally difficult to coat or oil. One of the oil's main characteristics is its excellent protection against

water without compromising the wood's important function of moisture regulation. Project Oil is available in 7 transparent and intermixable wood colours. An overcoating with the two-component OLI-AQUA TOP 51.20 parquet floor sealer is possible.

- Easy application, by hand and machine
- Excellent auto-penetration
- As priming oil under OLI-AQUA TOP 51.20 it minimizes side-bonding and is colouring or colour-intensifying
- DIBt certified

Colours: Nature/uncoloured, Lime white, Grey, Teak, Mahogany, Walnut, Padouk, Wenge, Project oil spray nature

Packaging: 10, 3, 1 l

Consumption: 1-2 coats | 40-50 g/sqm per coat (20-25 sqm/l), depending on the absorptivity of the surface

Tools: Mohair roller, oil brush or flat brush, green pad, white pad

After-treatment and care: Use OLI-NATURA Wood Care Oil for reconditioning and care. For regular maintenance cleaning we recommend OLI-NATURA Wood Soap



Technical data scan QR-Code

OLI-NATURA HS Coloroil

HIGH-SOLID COLOUR OIL FOR THE COLOURED BASIC TREATMENT OF HIGH-TRAFFIC FLOORBOARDS, PARQUET FLOORING, WOODEN AND CORK FLOORS IN THE INTERIOR.



OLI-NATURA HS Color Oil is a pigmented, almost solvent-free high-solid oil with 96% solids preferably for a machine application on large parquet and wood surfaces. Only one application is sufficient to achieve a surface that is excellently resistant to water, household chemicals and dirt. Due to the deep impregnating effect of HS Color Oil, you can do without an after-treatment with an uncoloured oil for protection. HS Color Oil is available in 8 transparent and intermixable wood colours. For lighter colours, HS Color Oil can also be mixed with the uncoloured HS Professional Oil. An overcoating with the two-component OLI-AQUA TOP 51.20 | 2c parquet floor sealer is equally possible.

water without compromising the wood's important function of moisture regulation. Project Oil is available in 7 transparent and intermixable wood colours. An overcoating with the two-component OLI-AQUA TOP 51.20 parquet floor sealer is possible.

- Highly productive
- Transparent colouring with only one application
- Hard-wearing
- DIBt certified

Colours: Polar white, Lime white, Grey, Teak, Mahogany, Walnut, Padouk, Wenge

Packaging: 3, 1 l

Consumption: 1 coat | 20-40 g/sqm per coat (25-50 sqm/l), depending on the absorptivity of the surface

Tools: Mohair roller, oil brush or flat brush, green pad, white pad

After-treatment and care: Use OLI-NATURA Wood Care Oil for reconditioning and care. For regular maintenance cleaning we recommend OLI-NATURA Wood Soap



Technical data scan QR-Code

OLI-NATURA HS Professional oil

HIGH-SOLID OIL FOR THE BASIC TREATMENT OF HIGH-TRAFFIC FLOORBOARDS, PARQUET FLOORING, WOODEN AND CORK FLOORS IN THE INTERIOR.



Almost solvent-free high-solid oil with 98% solids, preferably for machine application on large parquet and wood surfaces. Designed for professional users who want to achieve maximum surface protection with just one application. The impregnated surfaces are antistatic, easy to clean, durably resistant to wear as well as extremely resistant to water and household chemicals.

- Highly productive
- One application is sufficient
- Hard-wearing
- DIBt certified

Colours: Nature/uncoloured

Packaging: 3, 1 l

Consumption: 1 coat | 20-40 g/sqm per coat (25-50 sqm/l), depending on the absorptivity of the surface

Tools: Mohair roller, oil brush or flat brush, green pad, white pad

After-treatment and care: Use OLI-NATURA Wood Care Oil for reconditioning and care. For regular maintenance cleaning we recommend OLI-NATURA Wood Soap



Technical data scan QR-Code